


# *The Ring Imaging Cherenkov Detector (RICH) of the AMS Experiment*

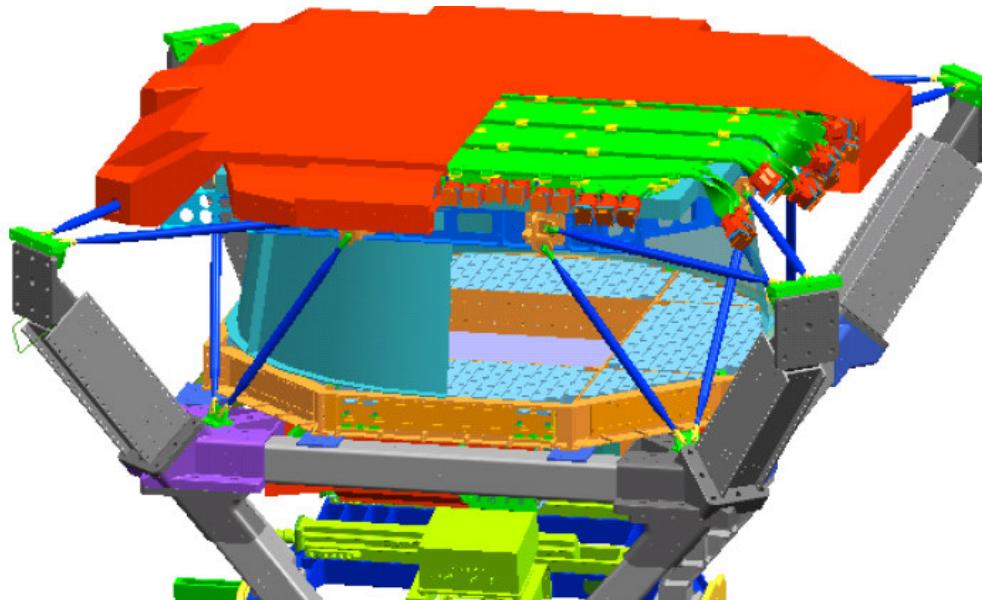

F. Barao on behalf of the RICH collaboration

barao@lip.pt

LIP/IST - Lisbon, Portugal

# Outline

- ✓ Physics Motivations
- ✓ RICH goals
- ✓ RICH design principles
  - ▶ radiator, reflector, detection cells
- ✓ Velocity and Charge accuracy
- ✓ RICH Prototype beam test
  - ▶ aerogel choice and properties
  - ▶ velocity and charge reconstruction
    - aerogel and NaF radiators
  - ▶ mirror reflectivity
- ✓ Conclusions

# Astrophysics motivations

## ✓ Cosmic Rays Propagation

- The study of secondary species such as Li, Be and B which result essentially from CNO spallation provides information about propagation of cosmic-rays (CNO group) in galaxy (B/C)  
 $Z > 2$  abundance only  $\sim 1\%$
- The propagation history of the Helium nuclei can be probed by measuring the ratio  ${}^3He/{}^4He$   
 ${}^3He$  is essentially secondary (from the  ${}^4He$  spallation)



## ✓ Cosmic Rays Clocks

- The measurement of the ratio  ${}^{10}Be/{}^9Be$  gives information about confinement of cosmic rays in the Galactic volume and is sensitive to different propagation models  
 $T_{1/2}( {}^{10}Be) \sim 1.5 \times 10^6$  yrs

## ✓ New Physics


- positrons, antiprotons, antideuterons : dark matter probe

See Talk of M. Sapinski, "Astrophysics with AMS02", OG.1.1

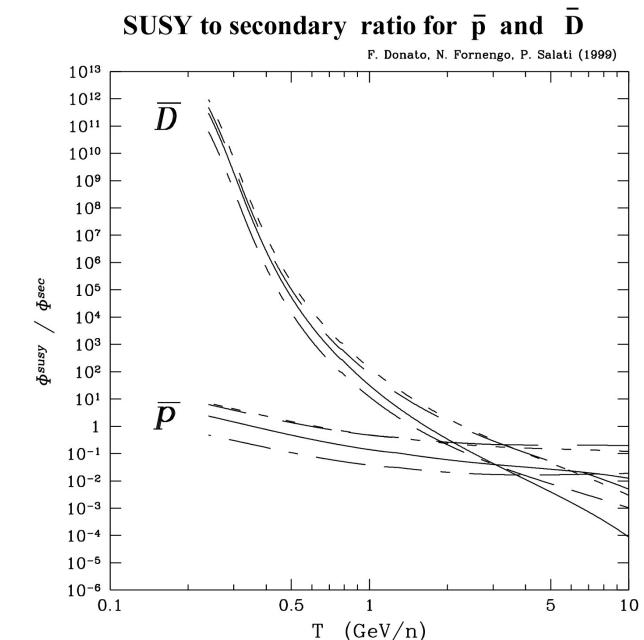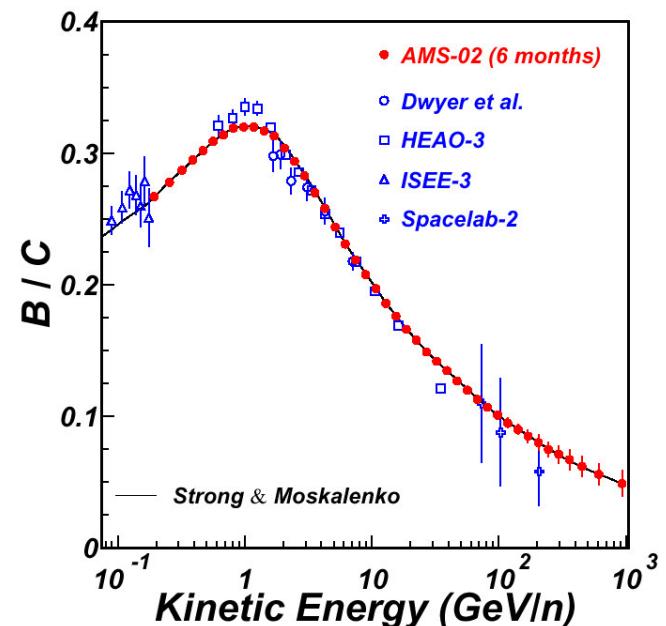

# RICH goals

- ✓ Electric charge measurement over a wide range of Z's  
**at least up to iron element (Z=26)**
- ✓ High accuracy on velocity measurement  
 **$\Delta\beta/\beta \sim 0.1\%$  for singly charged particles**
- ✓ Contribution to AMS redundancy on albedo rejection

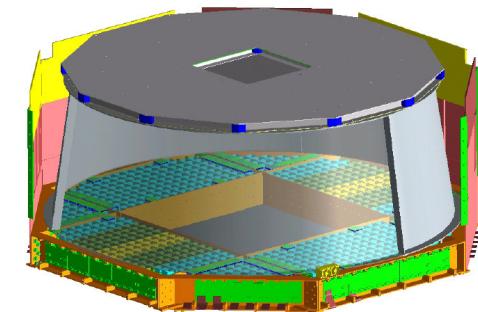

Mass separation deals with :


- ✓ momentum accuracy

$$\frac{\Delta p}{p} \sim 2\% \text{ up to } 10 \text{ GeV/c/n}$$

- ✓ velocity accuracy


$$\frac{\Delta\beta}{\beta} \sim \frac{0.1\%}{Z}$$

$$\frac{\Delta m}{m} = \frac{\Delta p}{p} \oplus \gamma^2 \left( \frac{\Delta\beta}{\beta} \right)$$

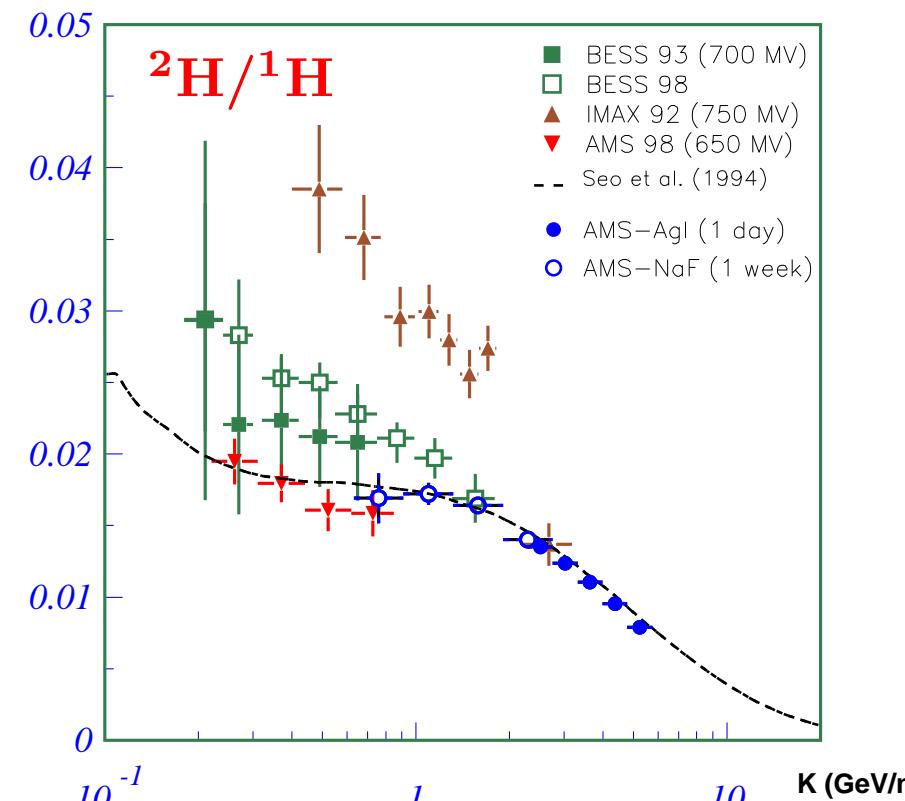

# Ring Imaging Cerenkov Detector (RICH)

- ✓ proximity focusing Ring Imaging Detector
- ✓ dual solid radiator configuration
  - ▶ sodium fluoride in central region  
 $n = 1.33$ , 5 mm thick
  - ▶ low index material - aerogel - elsewhere  
 $n = 1.05$ , 27 mm thick
- ✓ conical reflector
- ✓ photomultiplier matrix
  - 680 multipixelized ( $4 \times 4$ ) unit cells

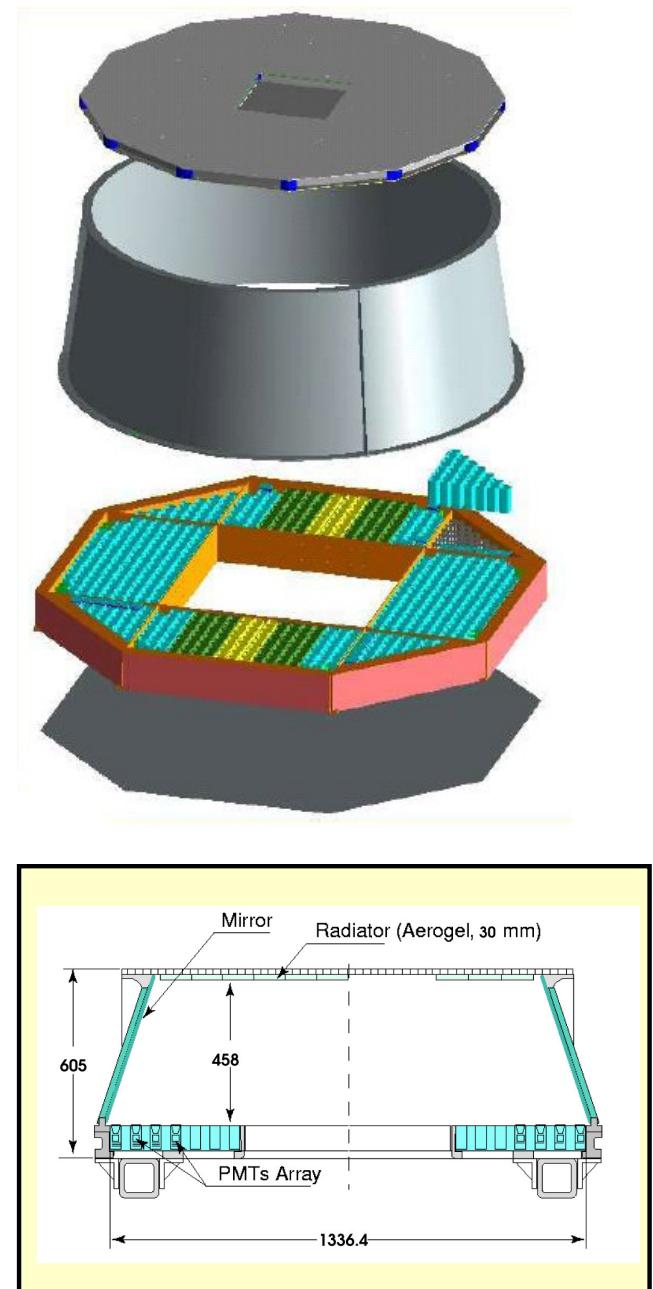

See C. LeLuc talk, "The AMS-02 spectrometer" OG.1.5

# RICH radiator plane

- ✓ Cerenkov radiation
- ✓ Light Yield

the light yield increases with the radiator thickness (L), the charge (Z), the velocity ( $\beta$ ) and refractive index (n) :

$$N_{p.e} \propto Z^2 L \left(1 - \frac{1}{\beta^2 n^2}\right) \int \epsilon dE$$

radiator	$n$	$Z=1, \beta \sim 1$	
		$N_\gamma$	$N_{p.e}$
aerogel	1.050	$\sim 75/cm$	$\sim 7$
NaF	1.334	$\sim 375/cm$	$\sim 4$


## ✓ Aerogel : lowest refractive index solid material

- hygroscopic : pure gas pumped inside ( $N_2$ )
- Rayleigh photon scattering  $\frac{d\sigma}{d\Omega} \propto \frac{(1+\cos^2 \theta_c)}{\lambda^4}$   
directionality of cerenkov photons lost  
transparency decreases for UVs  $\Lambda_{int} = \frac{\lambda^4}{C}$


## ✓ Ring acceptance

Sodium Fluoride (NaF) in the center increases the detector acceptance and extends the kinematic coverage ( $35 \times 35$  cm)

$$\cos \theta_c = \frac{1}{\beta n}$$



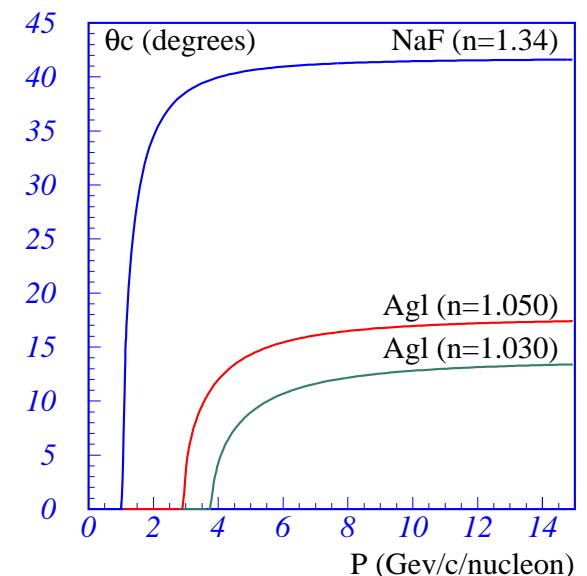


$$n=1.050 \quad C \sim 0.0055 \mu m^4/cm$$

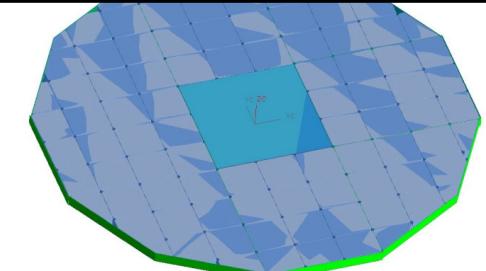

# Rich detector : Reflector


- ✓ a significant fraction ( $\sim 33\%$ ) of the photons emerging from the radiator point outside the detection matrix
- ✓ conical reflector made of carbon fiber structure with multilayer coating (Al + SiO<sub>2</sub>)
- ✓ high reflectivity > 85% @ 420 nm

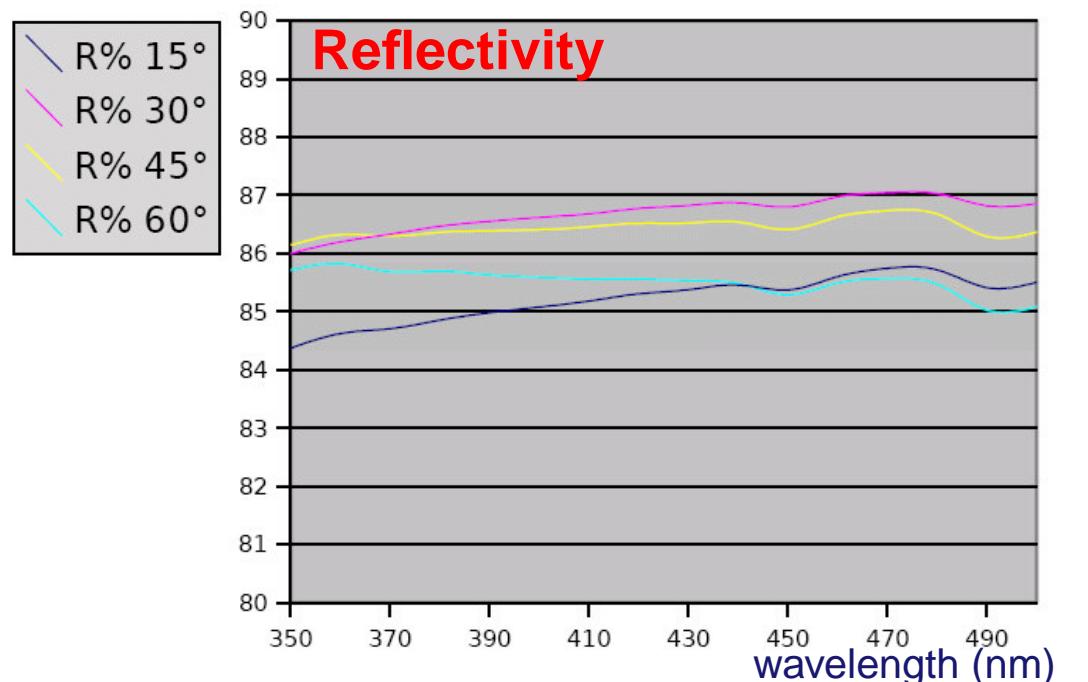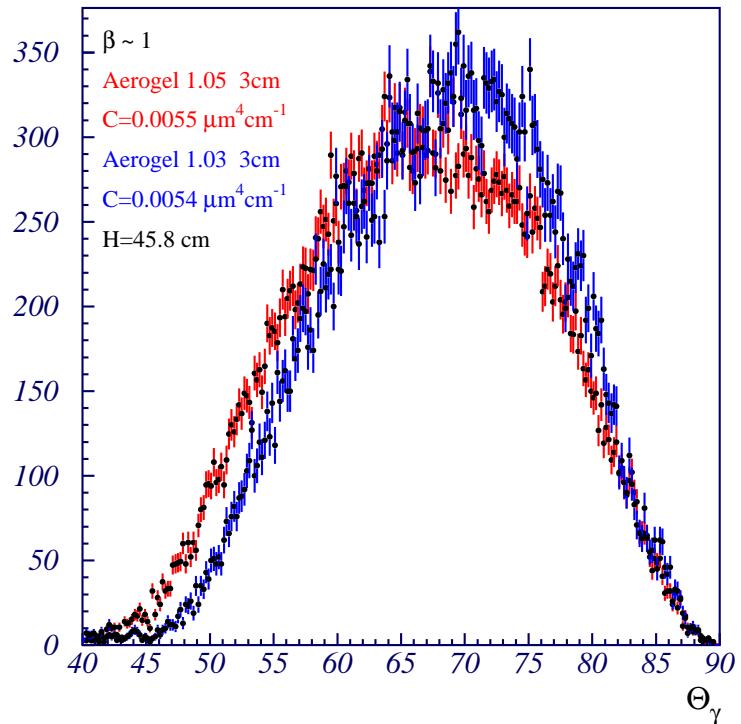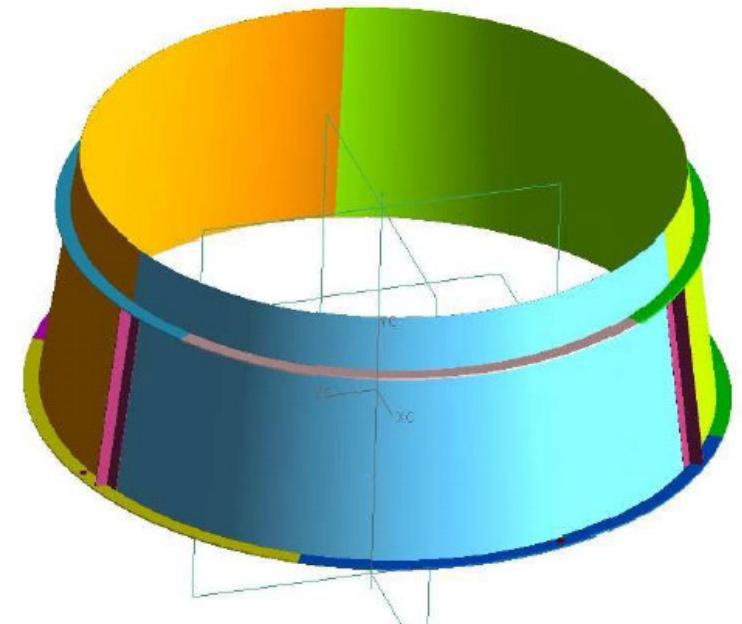

# RICH photon detection


## ✓ Photomultipliers

- ▶ matrix with 680 PMT's
- ▶ 4x4 multianode R7600-M16 (4.5 mm pitch)
- ▶ single photoelectron response
- ▶ spectral response 300-650 nm ( $\lambda_{max} \sim 420$  nm)

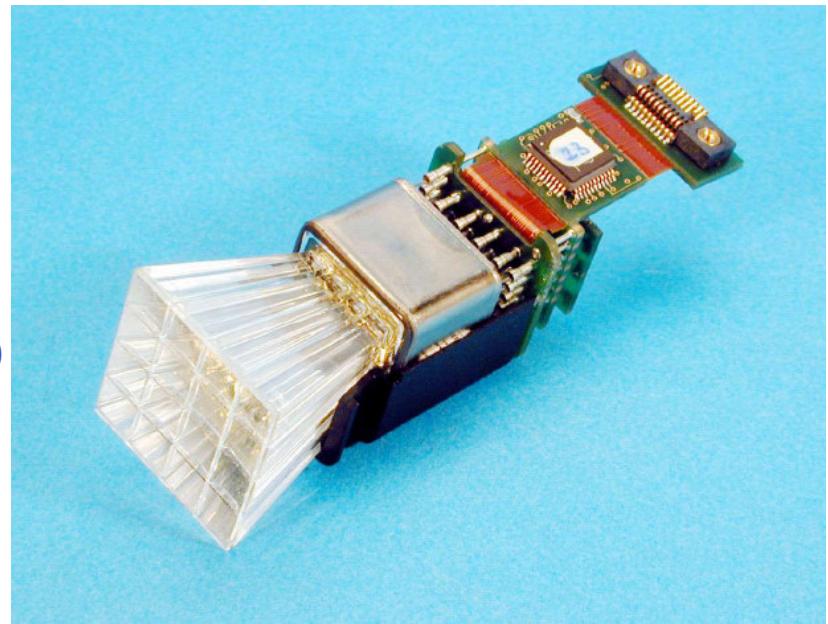


## ✓ PMT shielding and Light Guides

- ▶ high stray magnetic field ( $\sim 300G$ ) on readout plane
- ▶ magnetic shielding of PMTs needed (0.8-1.3 mm)
- ▶ increase photon collection eff with LGs
- ▶ Plexiglass ( $n=1.49$ ) solid guides
- ▶ Effective pixel size 8.5 mm

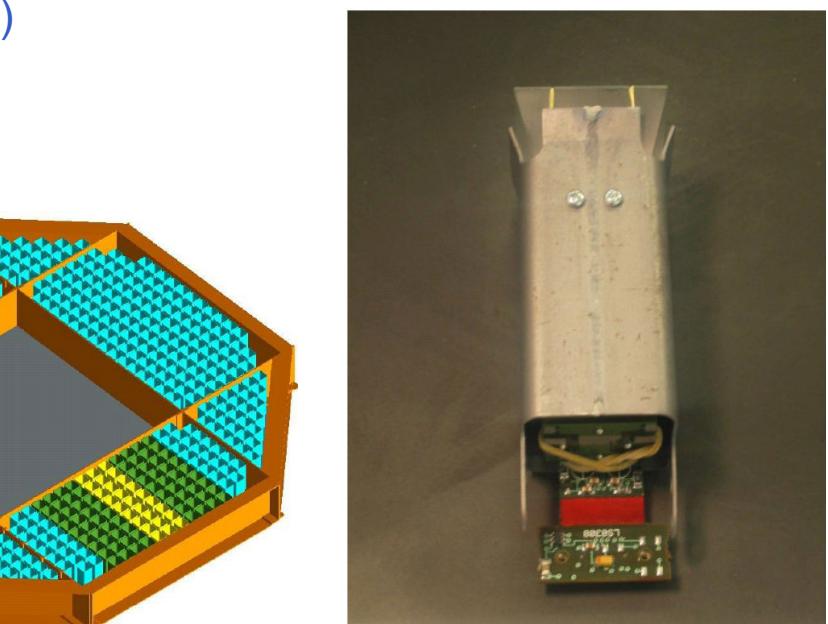

## ✓ Readout Electronics

- ▶ 16 channel ASIC developed
- ▶ two amplification gains ( $\times 1, 5$ )
- ▶ dynamic range from 1-100 pe
- ▶ low consumption ( $\sim 11$  mW)

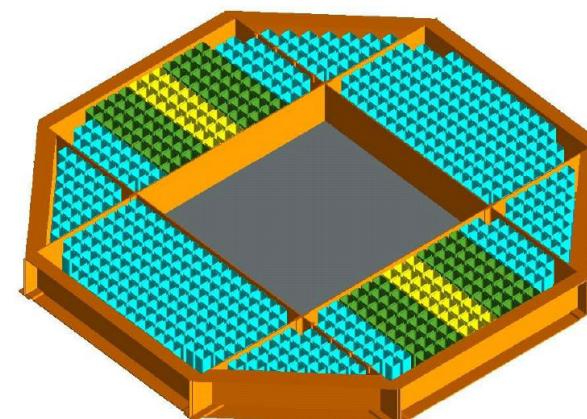

# RICH velocity and charge determination

- ✓ Velocity obtained from  $\theta_c$  measurement

$$\beta = 1/n \cos \theta_c$$

- ✓  $\beta$  uncertainties :

- ▶ pixel size ( 8.5 mm)
- ▶ radiator thickness ( $h \tan \theta_c$ )  
photon emission point unknown
- ▶ radiator chromaticity,  $n(\lambda)$

$$\frac{\Delta\beta}{\beta} = \frac{1}{N_{p.e}} (\tan \theta_c \Delta\theta_c \oplus \frac{\Delta n}{n})$$

radiator	$\Delta n/n$	$\beta = 1, Z = 1$	
		$\Delta\theta_c$	$\Delta\beta/\beta$
aerogel	$\sim 0.11\%$	4 mrad	$\sim 1.3 \cdot 10^{-3}$
naf	$\sim 0.43\%$	4.1 mrad	$\sim 3.6 \cdot 10^{-3}$

- ✓ Charge determination :

$$Z^2 \propto \frac{N_{p.e}}{\varepsilon}$$

$\varepsilon \equiv$  ring efficiency

ring acceptance,  $\gamma$  absorption, ...

- ✓ Z Uncertainties :

- ▶ statistical :

$$\Delta N_{p.e} = \sqrt{N_{p.e} (1 + \sigma_{p.e}^2)}$$

- ▶ systematics from non-uniformities :

- radiator : n, thickness, clarity, ...
- detection : LG, PMT, temperature effects, ...


$$\Delta Z = \frac{1}{2} \sqrt{\frac{1 + \sigma_{p.e}^2}{N_0} + Z^2 \left( \frac{\Delta \varepsilon}{\varepsilon} \right)^2}$$

## Aerogel tile uniformity requirements

thickness $\sim 0.5$ mm	refract index $\sim 10^{-4}$	• Clarity $\sim 5\%$
-------------------------	------------------------------	----------------------

# RICH prototype - Test Beam 2003


- ✓ CERN Indium ( $Z=49$ ) primary beam with 158 GeV/c/n
- ✓ beam selection :  $A/Z = 2, 2.25, 2.35$
- ✓ 8 days of data taking
- ✓  $10^7$  events collected
- ✓ very narrow beam ( $< 1$  mm most of time)
- ✓ many particle angles



Final RICH PMT matrix (680 PMT's)



Prototype RICH : 96 PMT's


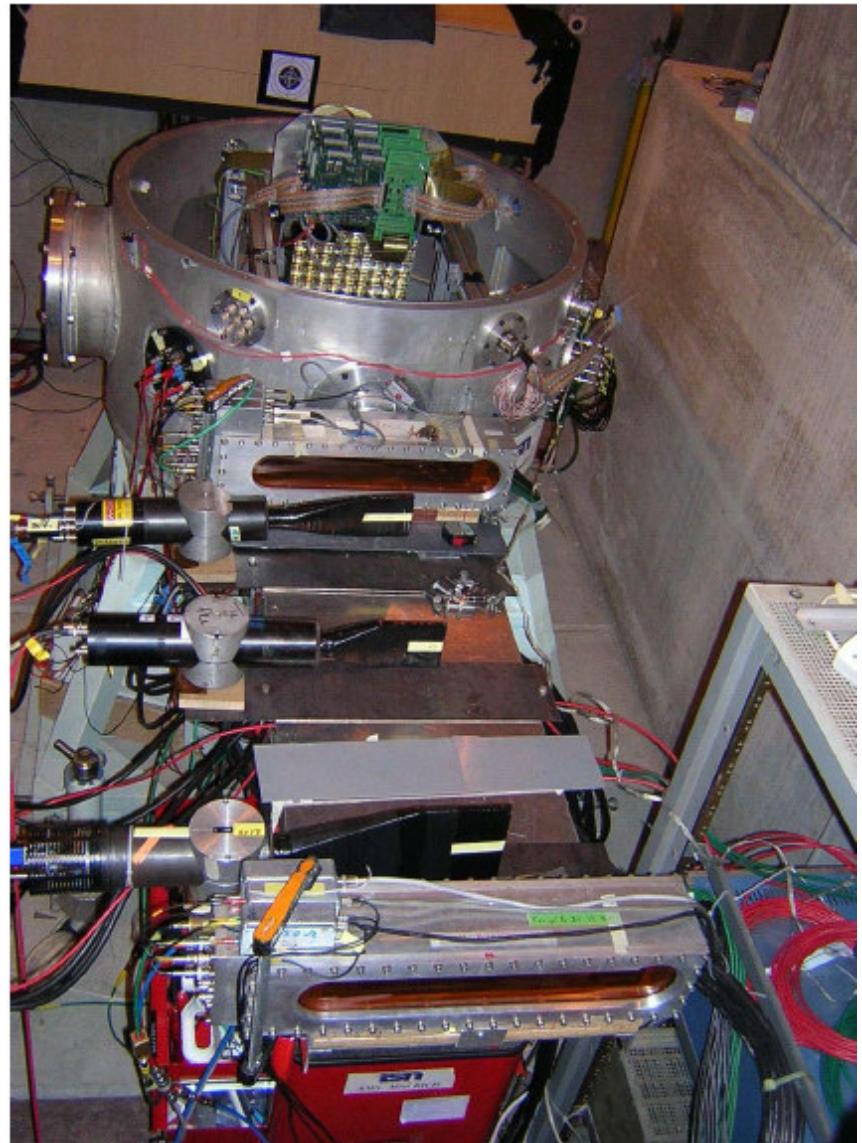


## aims

- ✓ evaluate rich performance
- ✓ test readout electronics (flight model)
- ✓ test aerogel and NaF radiators
- ✓ evaluate mirror reflectivity

# RICH - Test Beam 2003 : aerogel properties

## Light yield

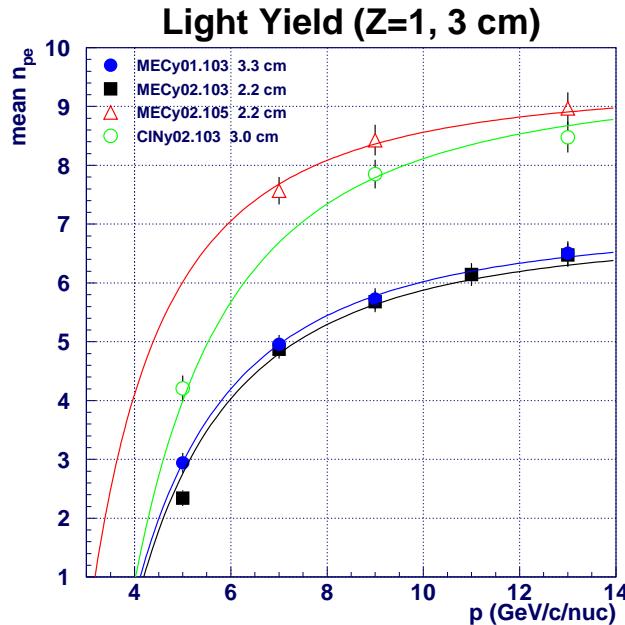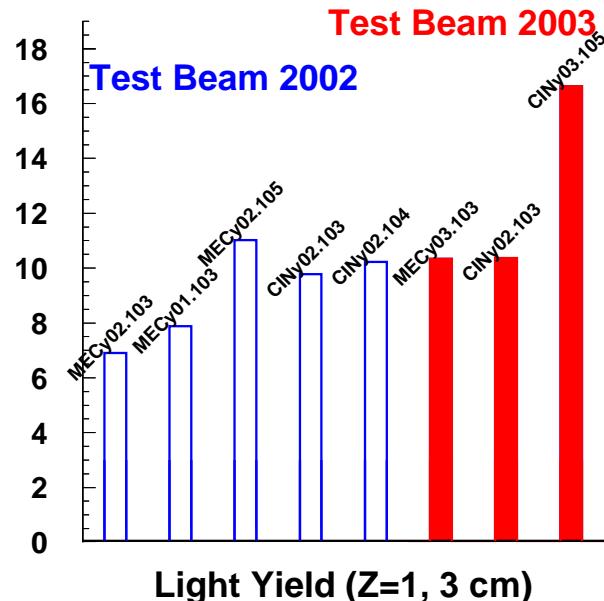

## Tile uniformity




Scan of aerogel tile with a wide beam to evaluate its uniformity

✓ refractive index

$$\Delta n < 10^{-4}$$



✓ photon yield

$$\frac{\Delta N_{p.e}}{N_{p.e}} < 1\%$$

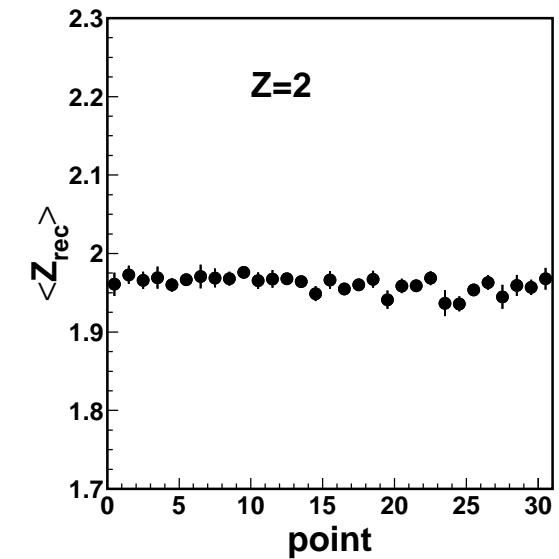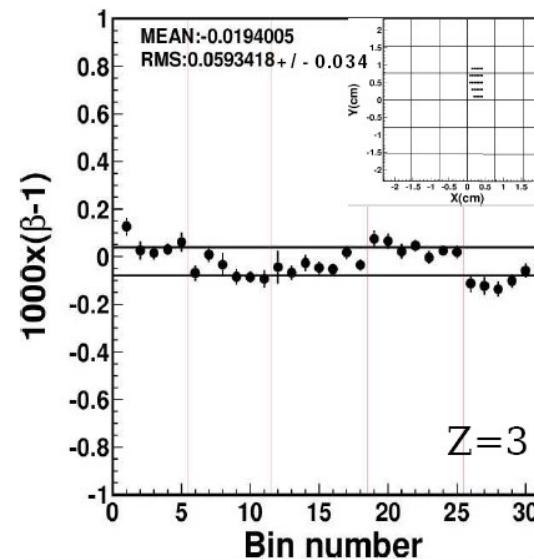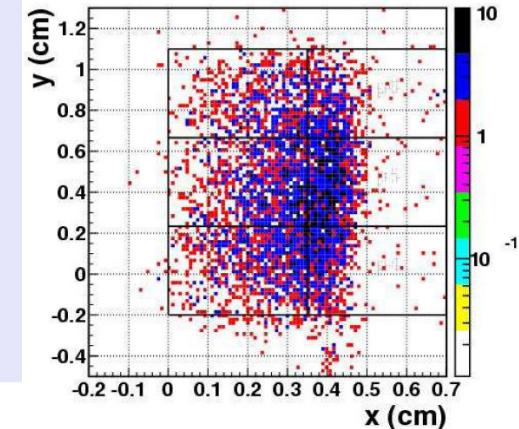


# RICH - Test Beam 2003 : $\beta$ reconstruction with agl

$$\frac{\Delta\beta}{\beta} \sim \frac{1}{\sqrt{N_{p.e}}} \left( \frac{\Delta\beta}{\beta} \right)_{hit}$$

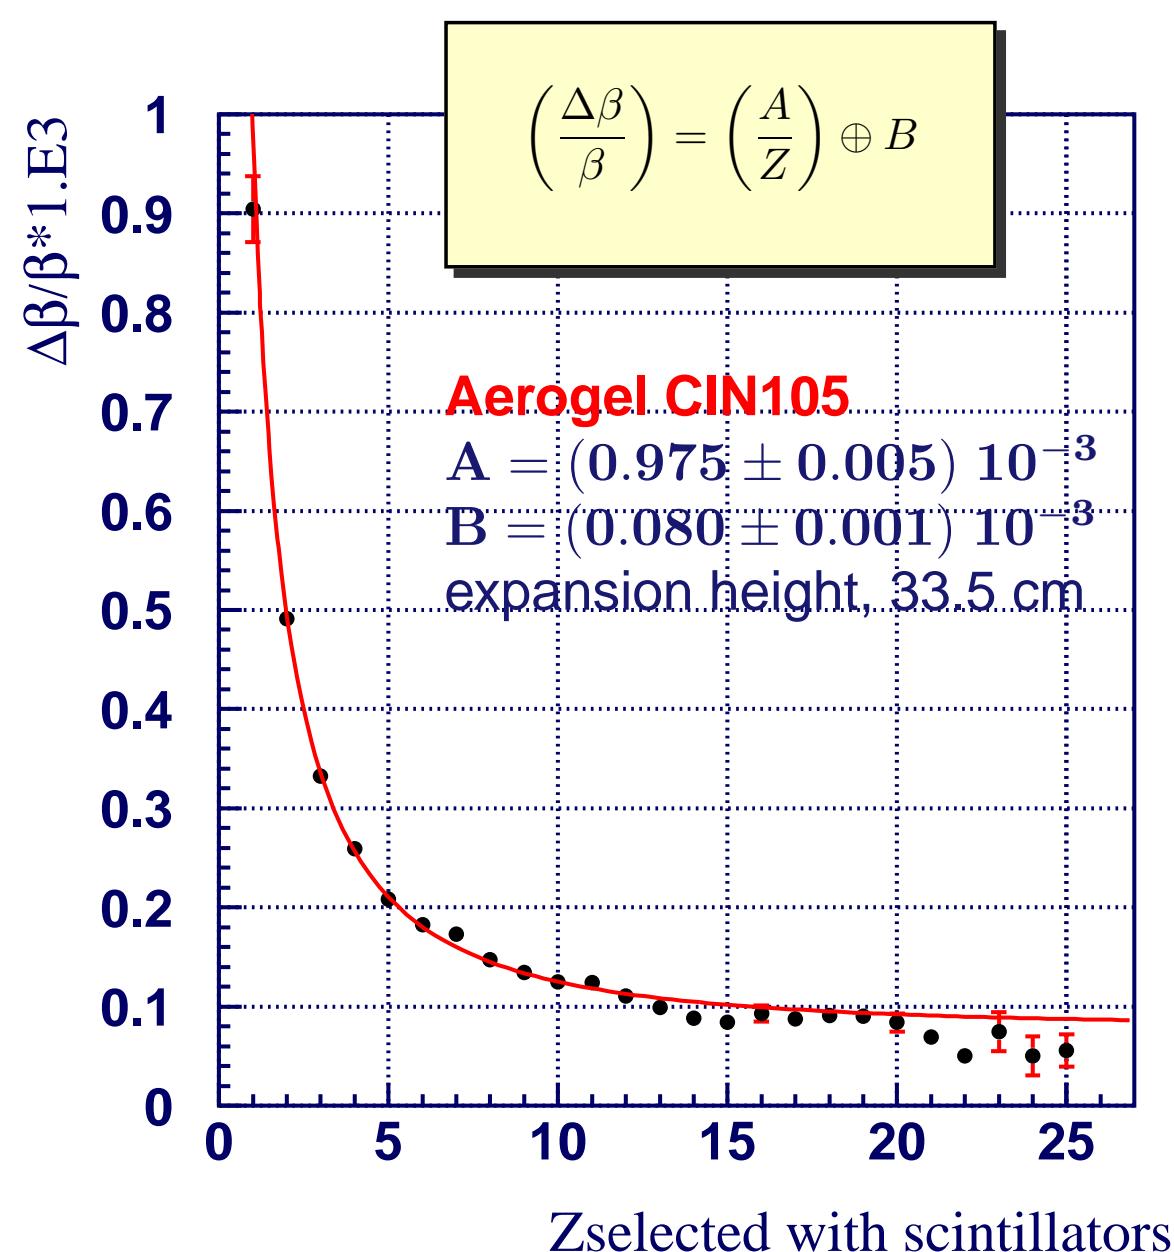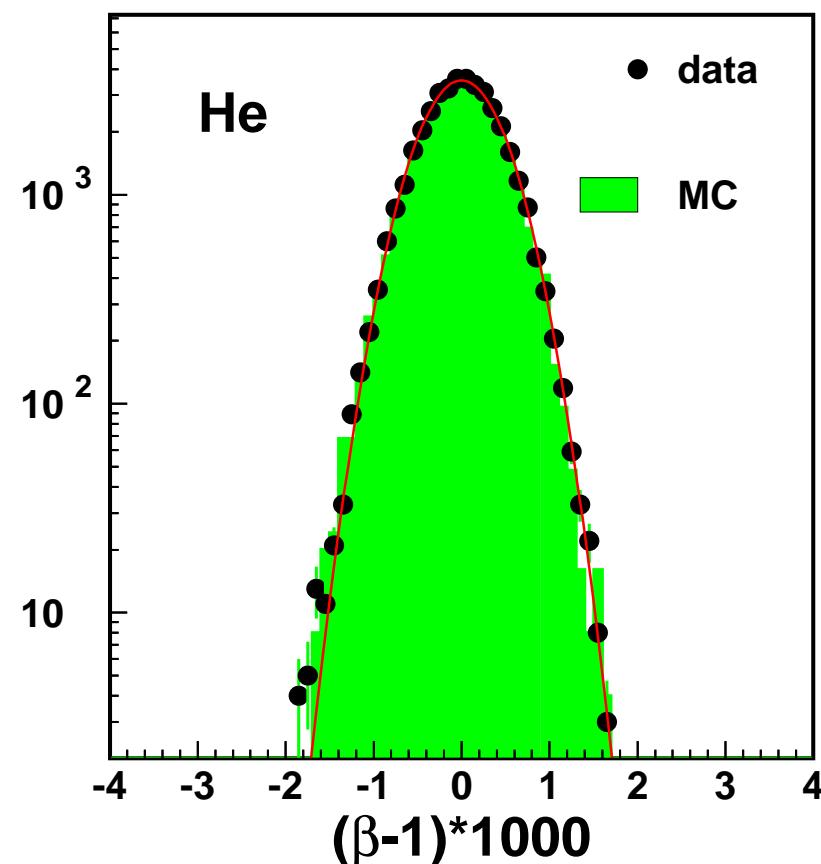


# RICH - Test Beam 2003 : Z reconstruction with agl

## Charge peaks




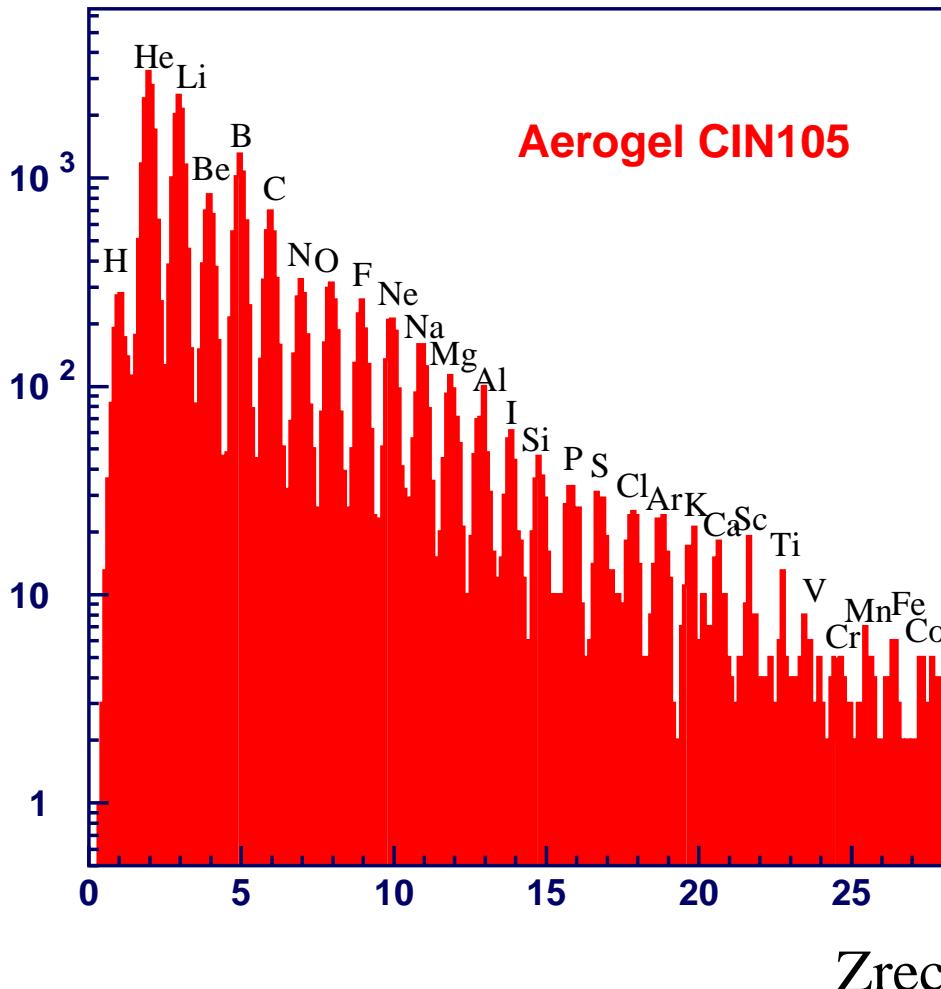


## Charge uncertainty


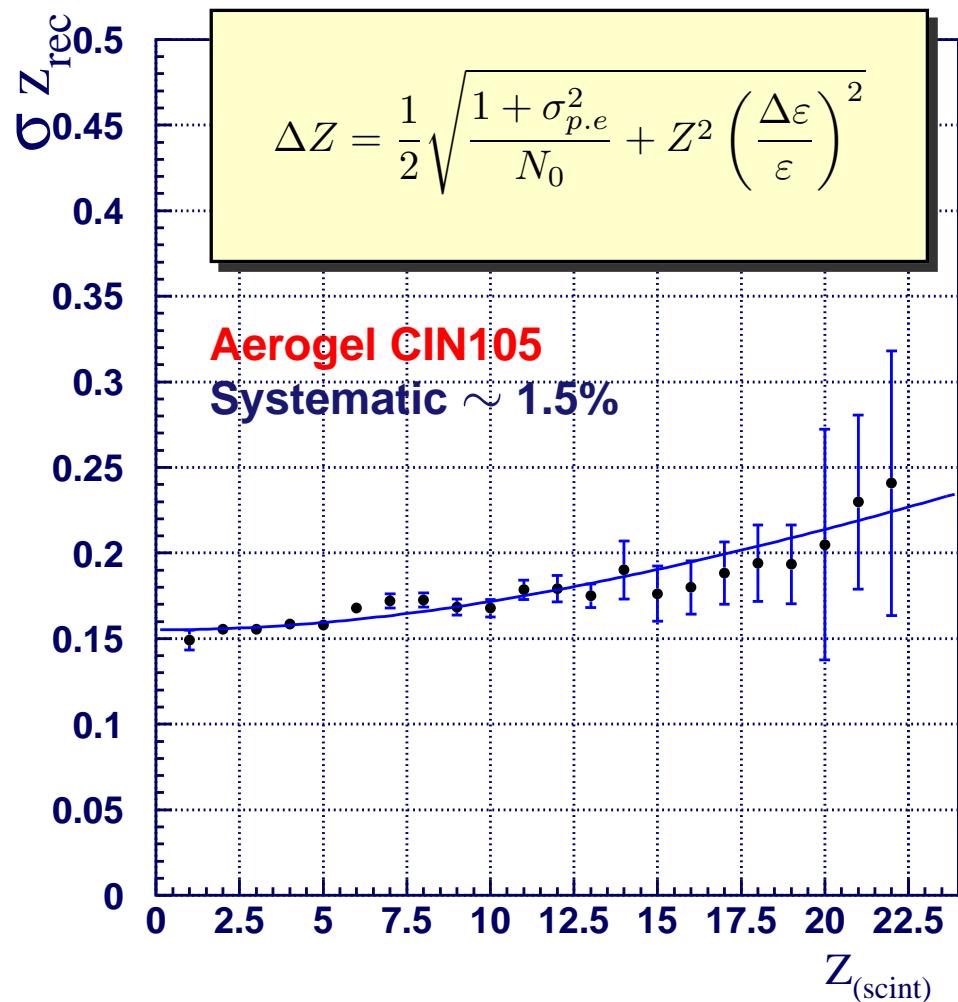


# RICH - Test Beam 2003 : mirror reflectivity

- ✓ A prototype mirror was tested
- ✓ Reflectivity measured from signal analysis of reflected and direct branches

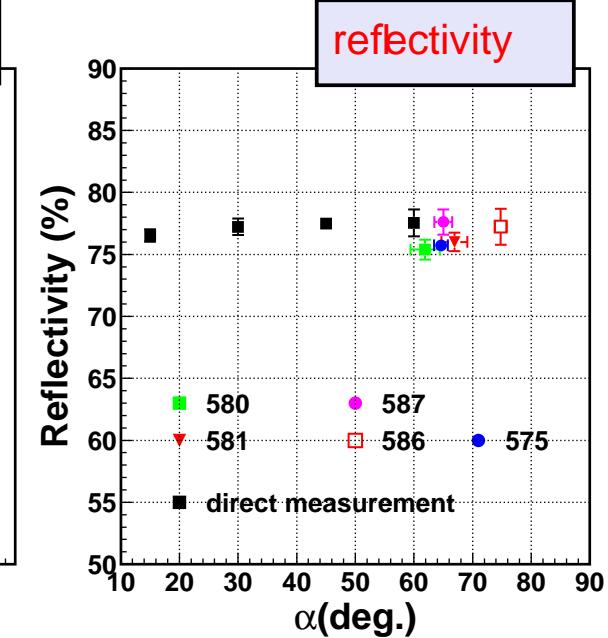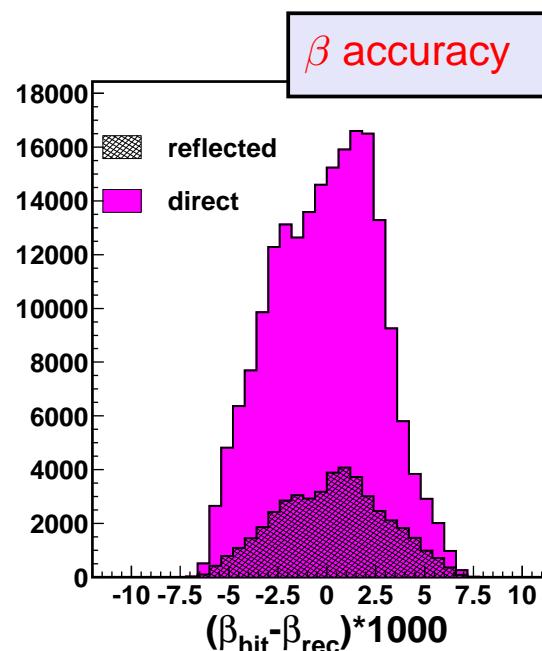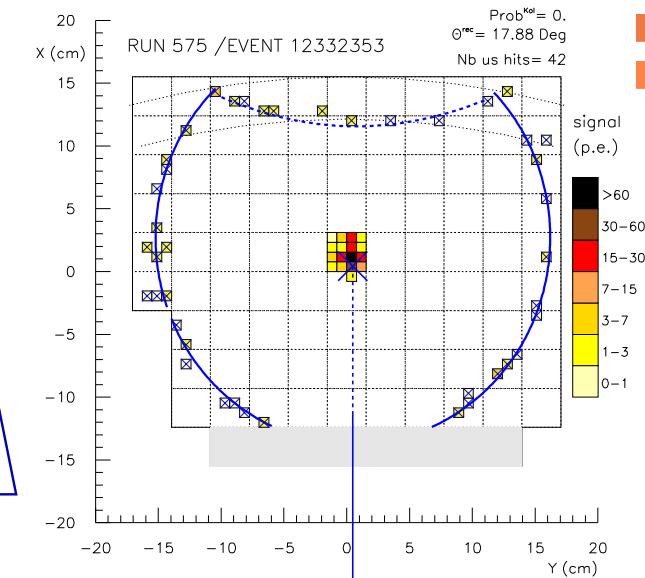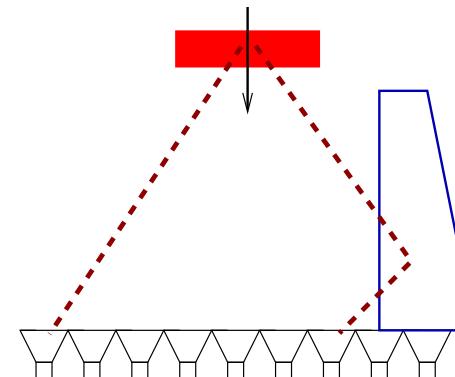

# RICH - Test Beam 2003 : $\beta$ reconstr with NaF

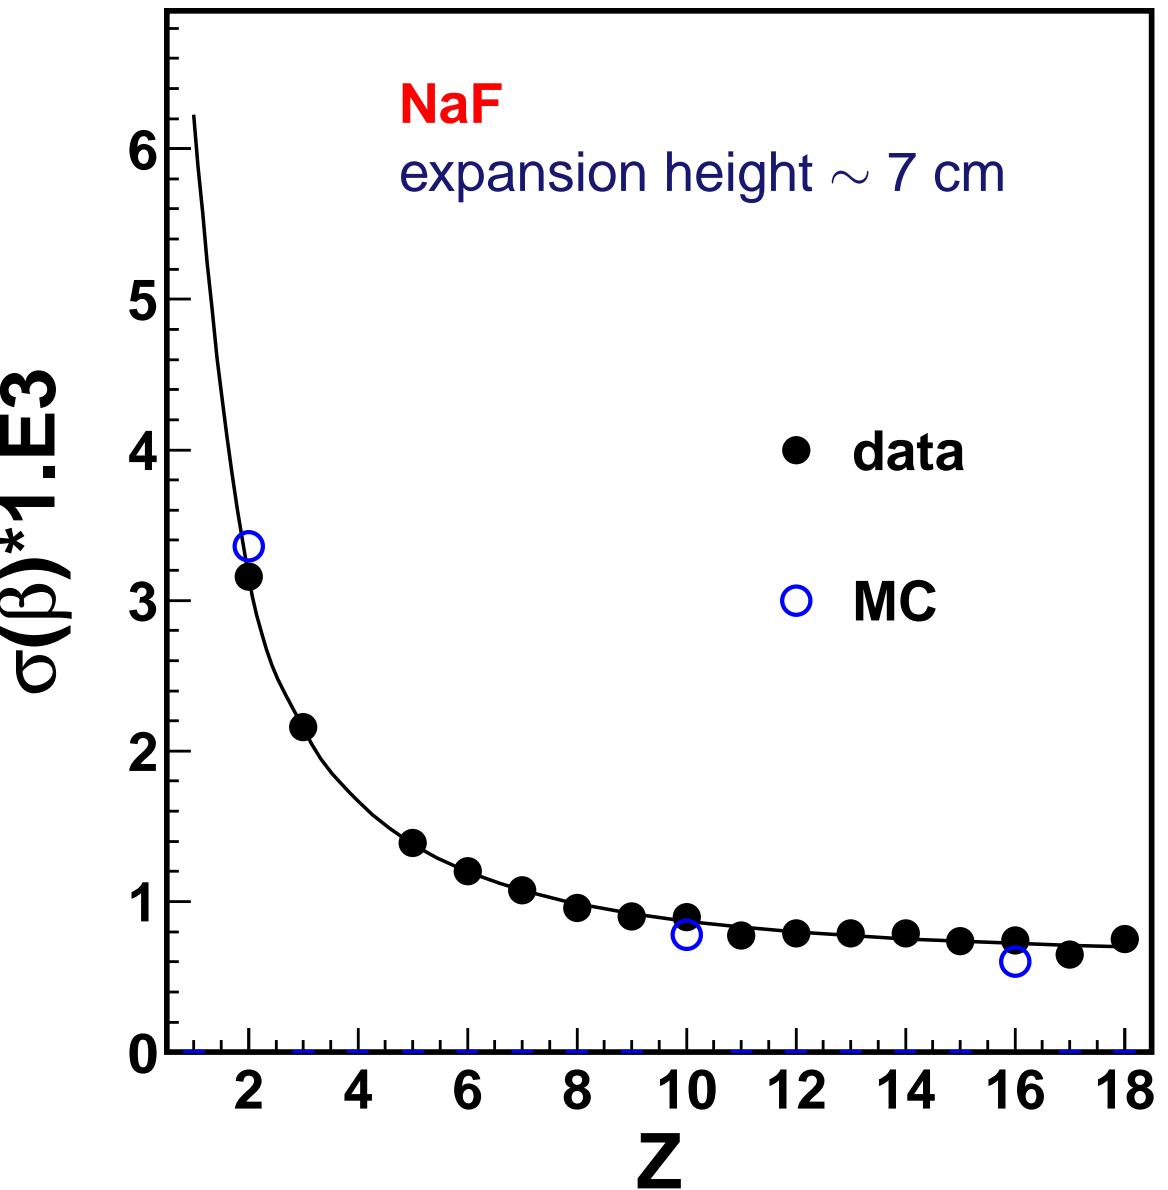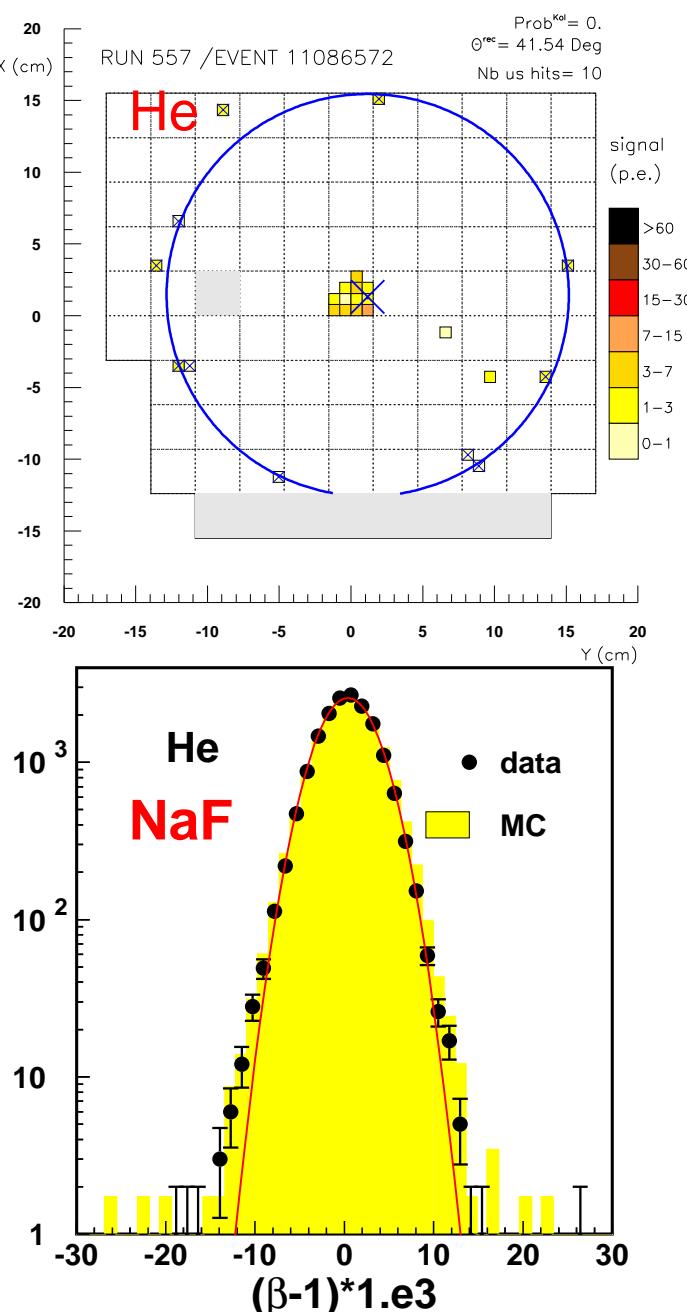

# Conclusions

- ✓ The AMS experiment to be installed in the International Space Station in 2008 will be equipped with a RICH
  - ▶ key role in astrophysics studies
  - ▶ large range charge identification
  - ▶ high accuracy in velocity
- ✓ Detector is being assembled
  - ▶ thermal and vibration tests performed
  - ▶ > 60 % of photon detection cells assembled
  - ▶ reflector ready by the end of 2005
- ✓ RICH design validated by intensive tests to a RICH prototype made of 96 photodetection cells
- ✓ RICH integration in AMS scheduled to July 2006